



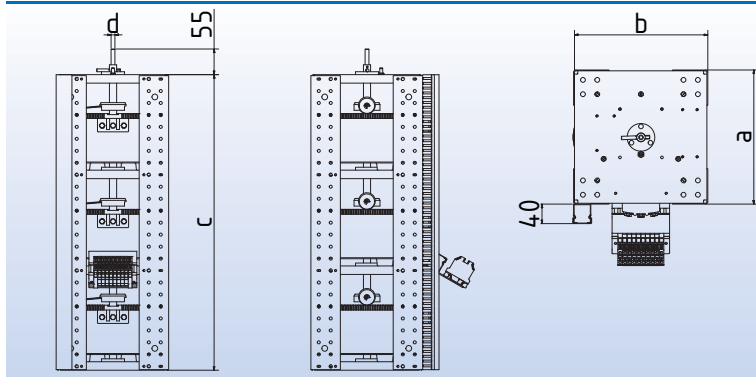

Three-phase variable ratio ring autotransformers according to VDE 0552/69

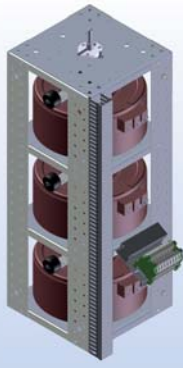

Design:

Open frame, stationary, for device installation and assembly in dry rooms, windings in autotransformer connection, connection to screw terminals.

IP 00, to 2A insulation class E, above: insulation class B,
max. ambient temperature 40°C (ta40°C/B).

Higher currents, other voltages or version with separate winding available upon request.

Type	Current 3 x A	3 x 400V 3 x 0-400V Item no:	Current 3 x A	3 x 400V 3 x 0-450V Item no:	Current 3 x A	3 x 400V 3 x 0-520V Item no:
RDRSP 73	0,8	0189-00000073	-	-	-	-
RDRSP 74	1,0	0189-00000074	0,5	0190-00000074	-	-
RDRSP 84	1,6	0189-00000084	0,8	0190-00000084	-	-
RDRSP 94	2,5	0189-00000094	1,6	0190-00000094	1,0	0191-00000094
RDRSP 95	3,2	0189-00000095	2,0	0190-00000095	1,25	0191-00000095
RDRSP 114	4,0	0189-00000114	-	-	1,6	0191-00000114
RDRSP 115	5,0	0189-00000115	4,0	0190-00000115	2,0	0191-00000115
RDRSP 116	6,3	0189-00000116	5,0	0190-00000116	2,5	0191-00000116
RDRSP 136	8,0	0189-00000136	6,3	0190-00000136	5,0	0191-00000136
RDRSP 137	10,0	0189-00000137	8,0	0190-00000137	-	-
RDRSP 157	12,5	0189-00000157	10,0	0190-00000157	6,3	0191-00000157
RDRSP 178	16,0	0189-00000178	12,5	0190-00000178	8,0	0191-00000178
RDRSP 217	20,0	0189-00000217	-	-	-	-
RDRSP 257	25,0	0189-00000257	-	-	12,5	0191-00000257
RDRSP 2507	32,0	0189-00002507	-	-	-	-
RDRSP 2907	40,0	0189-00002907	-	-	-	-
RDRSP 2512	50,0	0189-00002512	40,0	0190-00002512	-	-
RDRSP 2912	63,0	0189-00002912	50,0	0190-00002912	32,0	0191-00002912
RDRSP 3515	100,0	0189-00003515	63,0	0190-00003515	63,0	0191-00003515

Type	Copper kg	Total kg	Dimensions approx. in mm			
			a	b	c	d
RDRSP 73	0,11	5,5	155	155	300	6
RDRSP 74	0,12	5,8	155	155	300	6
RDRSP 84	0,27	6,7	155	155	300	6
RDRSP 94	0,48	7,9	155	155	300	6
RDRSP 95	0,75	9,5	155	155	320	6
RDRSP 114	0,90	11,5	175	175	330	6
RDRSP 115	1,11	14,0	175	175	360	6
RDRSP 116	1,35	16,5	175	175	390	6
RDRSP 136	2,70	24,0	240	240	435	10
RDRSP 137	3,00	27,0	240	240	485	10
RDRSP 157	3,60	30,0	240	240	485	10
RDRSP 178	4,80	44,0	260	260	535	10
RDRSP 217	6,50	55,0	240	240	618	10
RDRSP 257	9,50	66,0	315	315	618	10
RDRSP 2507	9,80	70,0	390	390	695	10
RDRSP 2907	13,50	88,0	390	390	695	10
RDRSP 2512	18,00	140,0	390	390	920	10
RDRSP 2912	24,00	160,0	390	390	920	10
RDRSP 3515	32,40	260,0	405	405	1070	10