

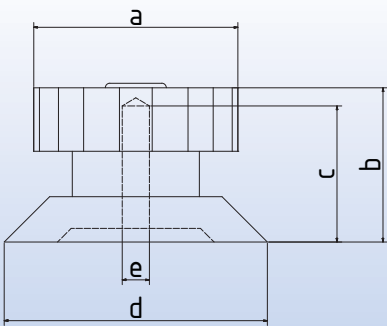


Design:
Various motor drives and controls are available as options for all single- and three-phase variable ratio ring transformers. Please specify clearly when ordering. Please be aware that the dimensions are different for versions with motor and control card. Please contact us directly for these. Additional options and versions upon request.

Type	Description
AC-motor	AC motor 230VAC. (control via, e.g., on/off button)
DC-motor	DC motor with control card with external actual value (control via potentiometer or 0-10VDC)
DC motor with control card	DC motor with control card with internal actual value (control via potentiometer or 0-10VDC)
Interface	RS232/485 interface for control card



Type	Item no:	Dimensions approx. in mm				
		a	b	c	d	e
REK 30-40-6	0084-00000001	38	28	12	41	6
REK 30-60-6	0084-00000002	48	34	28	58	6
REK 30-60-10	0084-00000003	48	34	28	58	10
REK 30-90-6	0084-00000004	76	40	28	90	6
REK 30-90-10	0084-00000005	76	40	28	90	10



Type	Item no:	Diameter mm	Label
RES 31-60-100	0085-00000001	60	0-100%
RES 31-60-230	0085-00000002	60	0-230V
RES 31-90-100	0085-00000003	92	0-100%
RES 31-90-230	0085-00000004	92	0-230V
RES 31-130-100	0085-00000005	132	0-100%
RES 31-130-230	0085-00000006	132	0-230V